




## DISASSEMBLING THE FOOT JOINT ON THE NUVO FLUTE

The following photo and instructions will help you to disassemble the C-foot joint on the Nuvo flute. This should not be necessary in general use but some players and technicians may be interested.

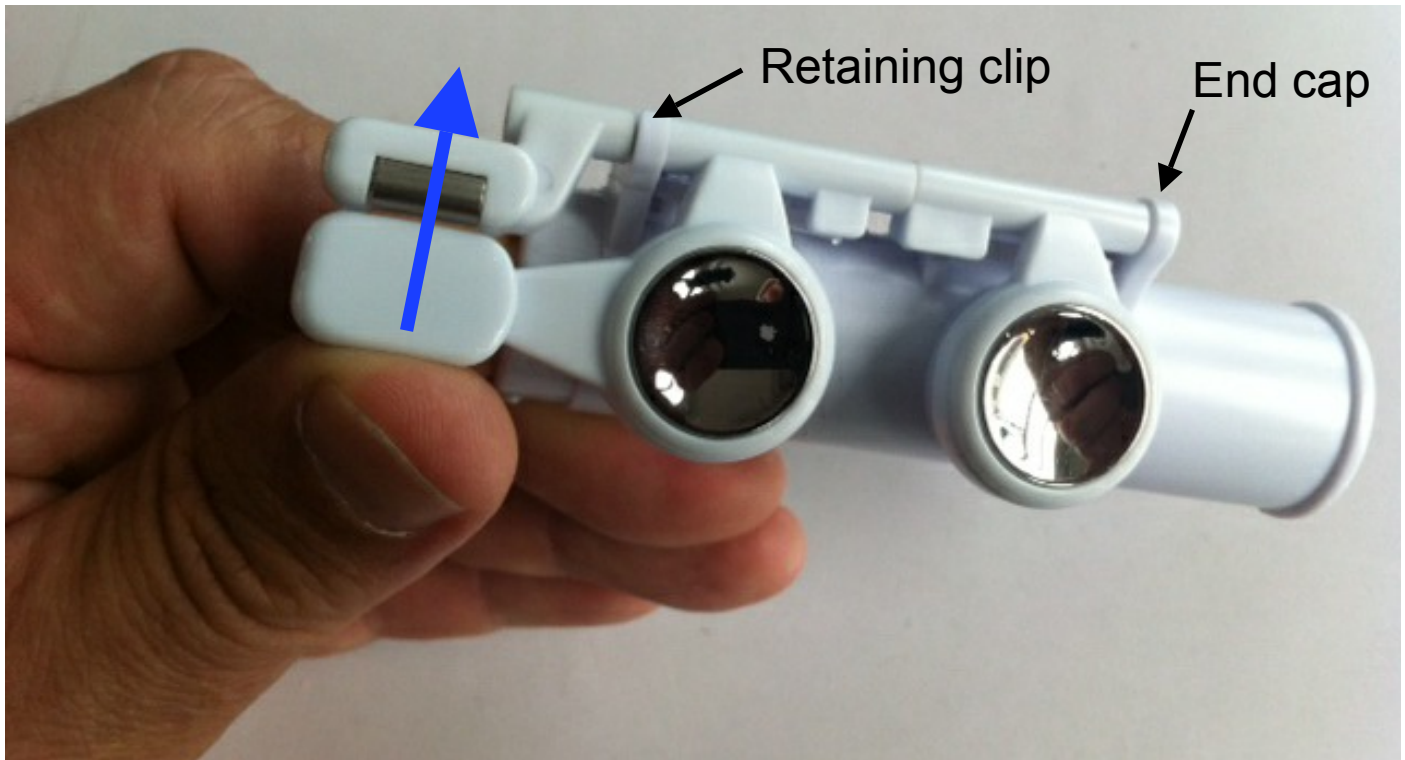

**STEP 1** - Hold the foot joint as shown with the left hand. The end of your left hand index finger should be inserted into the tube of the foot joint and position your thumb as shown in the image. Now push firmly with the left thumb in order to disengage the steel rod from the retaining clip. The key assembly will now come away from the foot joint.

**STEP 2** - To assemble the keys back onto the foot joint, perform the same action in reverse. Click the steel rod back into the retaining clip making sure the end of the rod is correctly positioned in the end cap first. Take great care to make sure the springs are correctly positioned and that the keys are performing correctly.